

RBA - 10"

## RBA - 10"



The cabinet is often used for the realization of small projects such as home networks or small company networks (SOHO).



## DOOR

The cabinet has fully glass door in standard. It can be steel or perforated if required.

## HIGH RIGIDITY CONSTRUCTION

Cabinet has a robust welded construction. High quality processing and the up-to-date technology ensure a perfect look of the cabinet.



## FLEXIBLE DOOR OPENING

The hinge system enables a comfortable access.



## DOOR LOCK

Locks safely the cabinet and protects the installed devices.



## ADJUSTABLE VERTICAL RAILS

10" rails are adjustably attached to the cabinet construction in predefined positions.



## BREAKOUT-TYPE BLANKING PANELS


Cable openings covered with breakout-type blanking panels are located in the top, bottom and rear part of the cabinet.

## RBA (DELTA 10")

TYPE	A	B	C	D	E	R1	R2	Weight gross (kg)	Weight net (kg)	Maximal recommended load (kg)
RBA-04-AS3-CAX-C1	248	169	255	310	260	212	212	5.5	5.4	20
RBA-06-AS3-CAX-C1	337	258	255	310	260	301	212	6.9	6.9	
RBA-09-AS3-CAX-C1	470	391	255	310	260	434	212	8.3	8.2	

### THE USE OF THE CABINET

Ideal solution for installation of 10" components. The cabinet is often used in realizations of small projects such as home networks or small company networks (SOHO). It is a popular accessory of standard 19" cabinets.

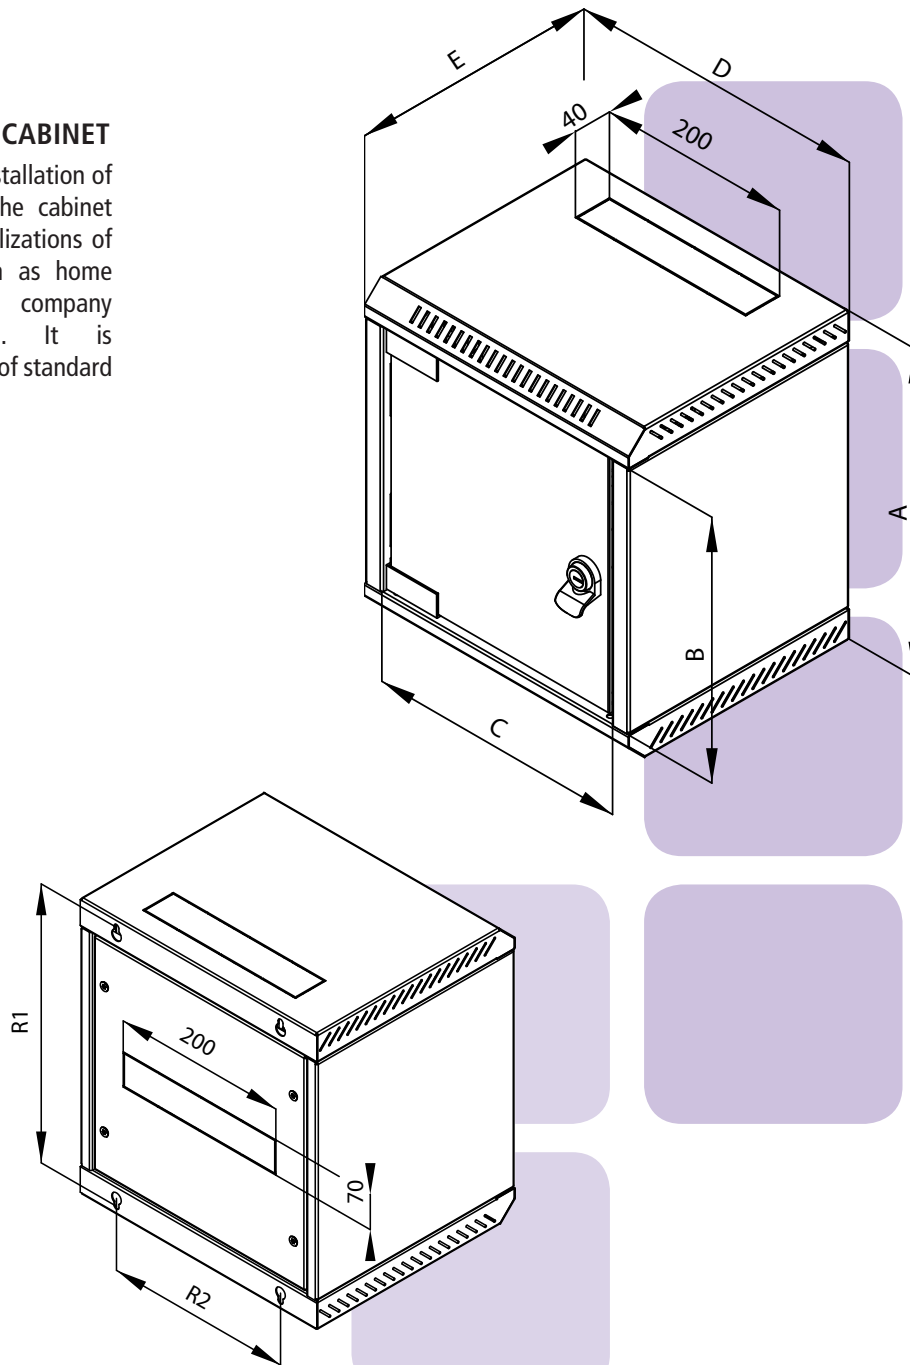

## RBA – 10" WALL-MOUNTED CABINET

### ■ DESCRIPTION, PURPOSE OF USE

- 10" wall-mounted cabinet with IP 30 protection
- Cabinet is to be hanged right on the wall.
- Cabinet includes two adjustable vertical rails.
- Cabinet construction:
  - compact welded cabinet
  - glass door: safety hardened glass, thickness 5 mm
- Max. permissible load of the door is 10 kg.
- Min. thickness of the surface finish is 65 µm.
- Cabinets are intended for installation of data and telecommunication devices and their distribution systems.
- The frame of the cabinet and all the removable parts are connected with earthing cables that have to be properly fixed and inserted into connectors during all the time when using the cabinet.
- There is one M8 screw placed on the bottom part of the cabinet as an earthing main point.
- Cable openings covered with breakout-type blanking panels are placed in the top and the bottom part of the cabinet rear side, others are in the top and the bottom side of cabinet.

### ■ OPERATION CONDITIONS

- Operation environment:
  - office
  - the cabinet is not intended for outdoor installations and for installations in environment that can influence negatively the functionality of the cabinet and the mounted devices (e.g. environment with danger of explosion or humid and wet surroundings)
- Must be protected against:
  - mechanical damage
  - improper manipulation
  - a different usage than the cabinet is intended for
- Improper manipulation is especially:
  - overloading (maximum recommended load exceeding)
  - device installation that can influence negatively operation and function of the cabinet or the installed equipment
  - change of the construction or design of the cabinet

### ■ INSTALLATION OF THE CABINET

- This type of cabinet is to be hanged right on the wall using screws, wall plugs and washers (included in the supply). Spacing of mounting holes is showed and indicated as „R" in the cabinet scheme.
- To secure the maximum recommended load, it is necessary to fix the cabinet on the wall with an appropriate carrying capacity (brick, concrete or similar) and to distribute the installed loading equally.

### ■ ENVIRONMENT PROTECTION

- All parts are made of recyclable materials and after its discard, it is necessary to dispose the cabinet according to valid regulations.

### ■ CERTIFICATE AND CONFORMITY

- This product is certified by ITI TÜV, certification number 01.064.845/09/07/02/0, date 26/11/2009 and is fully in accordance with ČSN EN 62208 (357040), (EN 62208:2003), (idt IEC 62208:2002).