
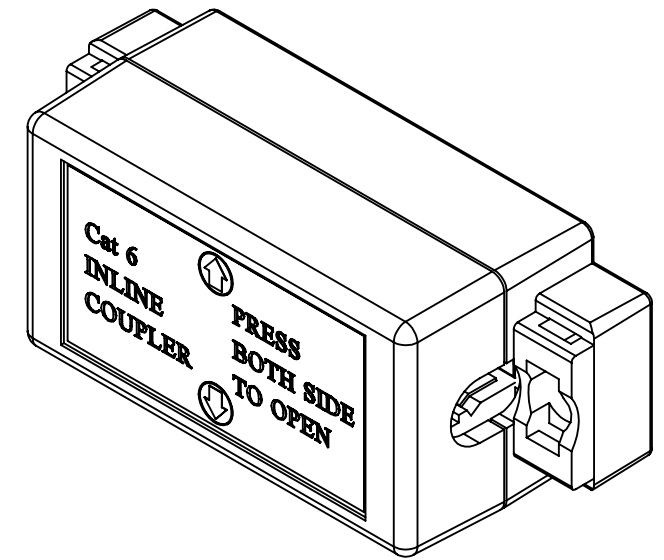
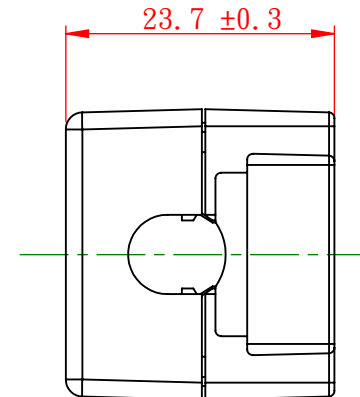
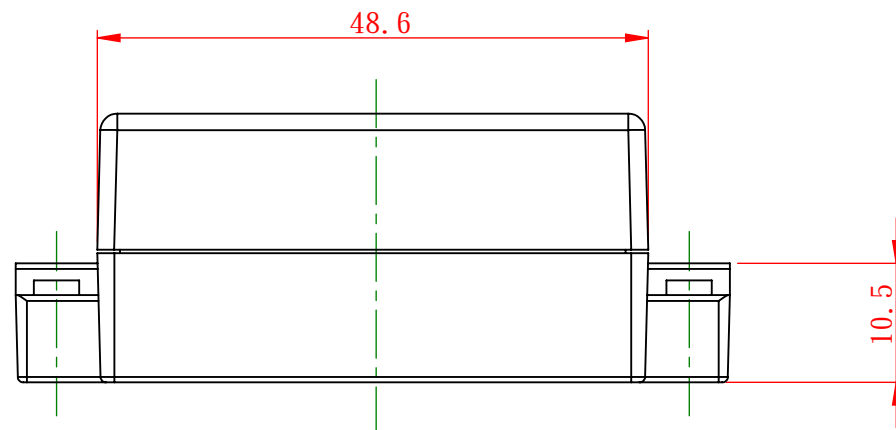
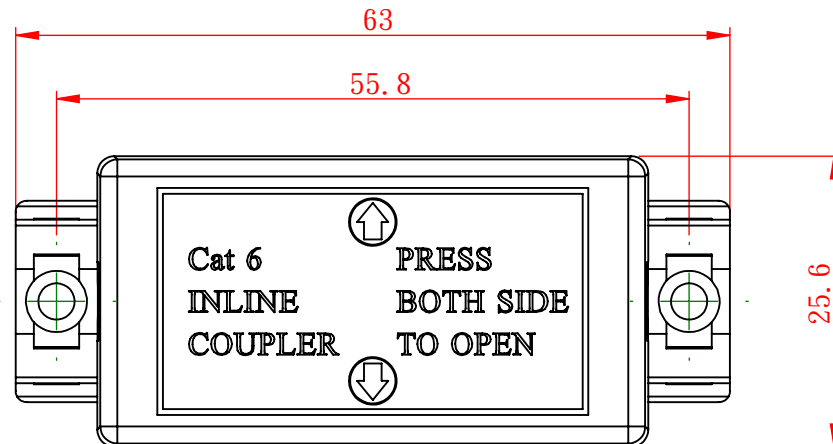


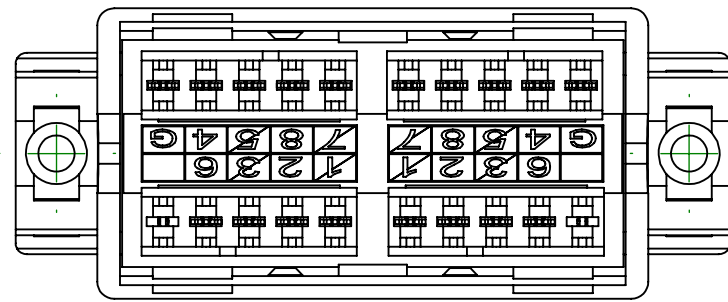

REFERENCE

ENCLOSURE
NYLON CABLE TIE X 2 PCS
SCREW (K2-3*16) X 2 PCS
TWIN ADHESIVE X 1 PC

MATERIAL


HOUSING : ABS, UL 94V-0.
IDC PLASTIC : PC, UL 94V-0.
IDC CONTACT : PHOSPHOR BRONZE, NICKEL PLATED.

PHYSICAL CHARACTERISTICS

OPERATING TEMPERATURE RANGE : -10°C TO 60°C.
STORAGE TEMPERATURE RANGE : -40°C TO 68°C.
HUMIDITY : 10% TO 90% RH (NON-CONDENSING).

ELECTRICAL

INSULATION RESISTANCE : 500 MΩ MINIMUM.
DC CURRENT RATING : 1.5 Amps.
INPUT TO OUTPUT D.C. RESISTANCE : 200 mΩ MAXIMUM.
CONTACT RESISTANCE : 20 mΩ MAXIMUM.
VOLTAGE PROOF (CONTACT TO CONTACT) : 1000 V D.C. OR A.C. PEAK.

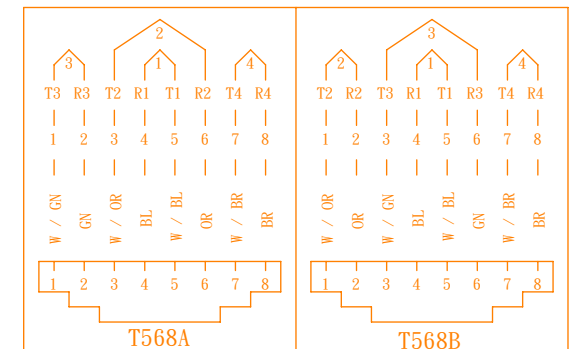

Scale		3:2			All Copy Rights Reserved	
3rd Angle Projection					EXW Excellence Wire Ind. Co., Ltd	
Unit		mm			Title 3D01-B01-00015	
Date		2020/3/25				
Tolerance						
~20	~50	~150	150~	ANGLE		
±0.2	±0.4	±0.5	±1.5	±2°	Drawn by Zeng	
					Checked by	