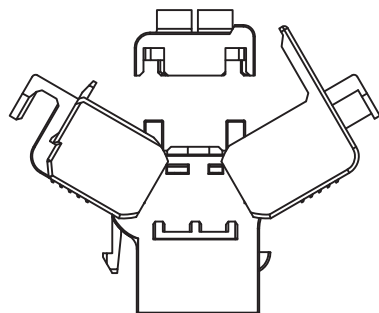


ACCORDING TO: ANSI/TIA-568-C.2
ISO/IEC 11801 2nd Edition
IEC 60603-7

BRACKET : NICKEL SILVER ALLOY.
KEYSTONE JACK HOUSING : ZINC ALLOY,NICKEL PLATED.
REAR HOUSING : ZINC ALLOY,NICKEL PLATED.
KEYSTONE JACK LATCH : PC+ABS,UL94V-0.
CONTACT HOLDER : PC,UL94V-0.
JACK CONTACTS : PHOSPHOR BRONZE,50U" GOLD PAINTING.
IDC PLASTIC : PC,UL94V-0.
IDC TERMINALS : PHOSPHOR BRONZE,TIN OVER NICKEL UNDERCOAT.


INSERTION LIFE : 750 MATING CYCLES WITH FCC COMPLIANT 8P PLUG.
 CONTACT FORCE : 100 GRAMS WITH FCC COMPLIANT 8P PLUG.
 PLUG RETENTION FORCE : 11 LBF MIN.
 DURABILITY : 30 TERMINATION CYCLES.
 CONTACT COMPATIBILITY : ACCOMMODATES 22 TO 24 AWG SOLID.
 OPERATING TEMPERATURE RANGE : -10 C TO 60 C.
 STORAGE TEMPERATURE RANGE : -40 C TO 68 C.
 HUMIDITY : 10%~90%RH.


INSULATION RESISTANCE : 500 MΩ.
DIELECTRIC WITHSTANDING VOLTAGE : 1000 V AC.
DC CURRENT RATING : 1.5 Amps.
DC RESISTANCE : 0.1Ω.
CONTACT RESISTANCE : 20mΩ.

* ONLY ACCEPT RJ-45 8P8C PLUG.



COMMUNICATION CIRCUIT ACCESSORIES

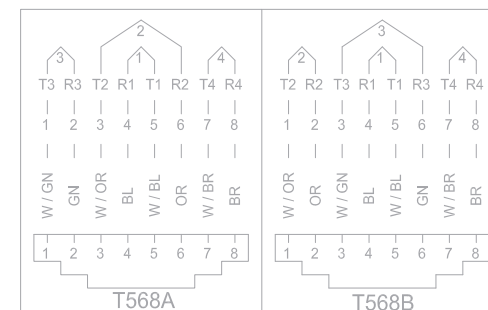

Scale		1:1			All Copy Rights Reserved	
3rd Angle Projection					 EXCELLENCE WIRE IND. CO., LTD.	
Unit		mm			Title 3D02-A01-00012 QKSSNBA-02-C6A-XX	
Date		2017-11-30				
Tolerance						
~20	~50	~150	150~	ANGLE		
±0.2	±0.4	±0.5	±1.5	±2°	Drawn by SYF	Checked by