

1 2 3 4 5 6 7

更改 REV	出图日期 DATE	设变内容 MODIFICATION	修改 DRAWN
A	2019/01/26		

A

B

C

D

A

B

C


D

SPECIFICATIONS

- ELECTRICAL:
UL APPLICATIONS: 250 VOLTS AC MAX. AT 2 AMPS.
DIELECTRIC WITHSTANDING VOLTAGE: 1000 VOLTS AC. 60 SEC.
INSULATION RESISTANCE: 500 MΩ.
CONTACT RESISTANCE: 20mΩ MAX.
OPERATING AMBIENT TEMPERATURE: -20°C - 75°C.
- MECHANICAL:
STRAIN RELIEF: 20 POUND MIN.
DURABILITY: 1200 MATING CYCLES.
- MATERIAL:
HOUSING: POLYCARBONATE, UL94V-0 OR UL94V-2.
COLOR: TRANSPARENT OR OTHER COLOR ARE AVAILABLE.
CONTACT BLADE: COPPER ALLOY.
GOLD PLATING: 3u"-50u", ARE AVAILABLE.
- USAGE:
SUITABLE FOR STRANDED & SOLID WIRE 23AWG ~ 26 AWG.
(It can be used for the wire OD from Ø 0.93 ~ Ø1.04)

规范

- 电器特性:
UL应用: 250 VOLTS AC. 最大 2 AMPS
耐电压: 1000 VOLTS AC. 60 秒
绝缘阻抗: 500 百万欧姆.
接触阻抗: 小于 20 毫欧姆
工作环境温度: -20°C - 75°C.
- 机械特性:
拉力测试: 大于 20 磅.
插拔测试: 大于 1200 次.
- 材质:
塑胶体: 聚碳酸酯, UL-94V-0 或 UL94V-2.
颜色: 透明, 或依客户需求
金片: 铜合金.
镀金厚度: 3u"-50u", 皆可提供.
- 适用线材:
多股线 & 单股线, 23AWG ~ 26AWG 均适用.
(芯线直径: Ø0.93 ~ Ø1.04 均可适用)

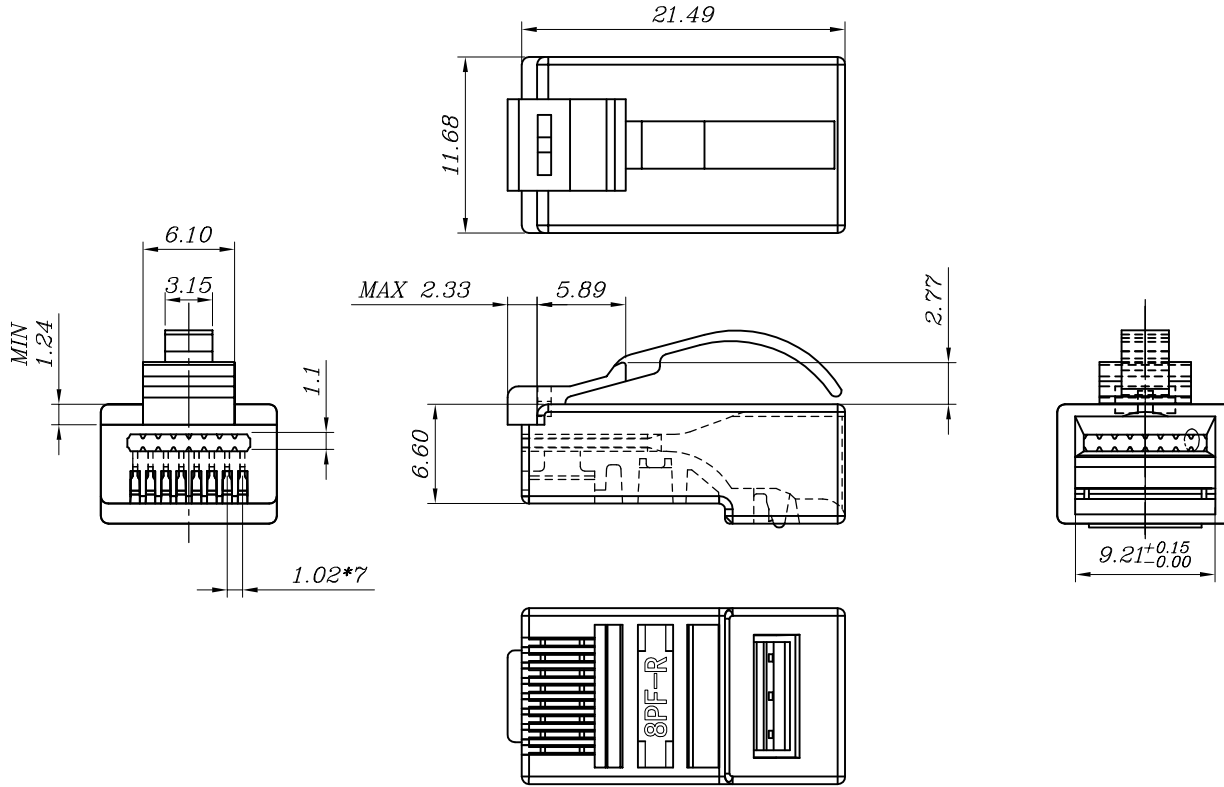

BLADE:	E	EB	Y	YB	Z	A	AE	AB	EC
Drawing									
Mark					✓				
GOLD PLATING	3Mu"	3u"	6u"	15u"	30u"	50u"	CABLE TYPE	FLAT	
Mark						✓	Mark	✓	



客户用产品图

EXW 宁波卓新通讯接插件有限公司 NINGBO EXCELLENCE COMMUNICATED CONNECTOR CO.,LTD			
DIMENSION IN mm (Inch) TOLERANCE UNLESS OTHERWISE SPECIFIED		材 质 MATERIAL	图 号 DWG NO.
		PC	PLUG-477-0001
.X±0.20	.X°±5°	名 称 TITLE	
.XX±0.10	.XX°±2°	P88FZ50V2-C5-EC	
审 核 APPROVAL	核 对 CHECKED	制 图 DRAWN	比 例 SCALE
沈红波	钟均江	Zach	2/1
			张 数 SHEET
			1/1
			更 改 REV
			A

1 2 3 4 5 6 7 ST-DR-009A