







REV	更改日期	变更内容	修改
11/05/05	11/05/05	MODIFICATION	DRAWN



Round



Flat

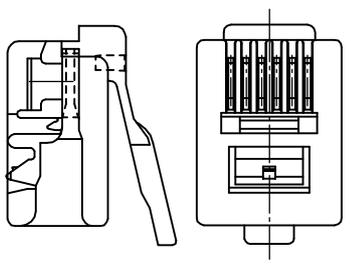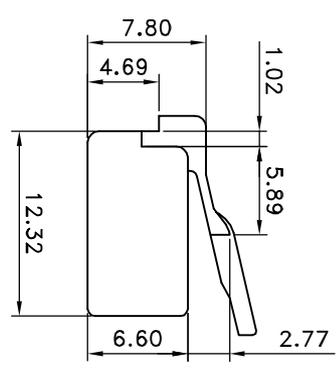

BLADE:

Type	E-03	B-03	Y-03	Z-03
Drawing				
Mark				

SPECIFICATIONS
 1. ELECTRICAL:
 UL APPLICATIONS: 250 VOLTS AC MAX., AT 2 AMPS.
 DIELECTRIC WITHSTANDING VOLTAGE: 500 VOLTS AC.
 INSULATION RESISTANCE: 100 MΩ.
 TERMINATION: RESISTANCE 20mΩ MAX AFTER ENVIRONMENTAL TESTING.
 2. MECHANICAL:
 CABLE-TO-PLUG TENSILE STRENGTH: 19.6N/PCS MIN.
 DURABILITY: 200 MATING CYCLES.
 3. MATERIAL & FINISH:
 HOUSING: POLYCARBONATE, UL94V-0 OR UL94V-2.
 COLOR: TRANSPARENT OR OTHER COLOR ARE AVAILABLE.
 CONTACT BLADE: PHOSPHOR BRONZE.
 CONDUCTOR: STRANDED & SOLID WIRE, 24AWG, 26 AWG.
 GOLD PLATING: 3u"~50u" ARE AVAILABLE.

规范
 1. 电器:

UL应用最大250V VOLTS AC.
 介质耐电压伏特数:500V VOLTS AC.
 绝缘阻抗:100百万欧姆。
 终端阻抗:在环境测试后最大可承受20微欧姆终端阻抗。

2. 机构
 拉力测试:至少19.6N/PCS.
 耐插测试:至少200次之插拔测试。
 3. 材质表面处理

塑胶壳:聚碳酸酯, UL-94V-0 or UL94V-2.
 颜色:透明,或者其他颜色亦可。
 金片:磷铜片。
 导体:多股线&单股线, 24AWG, 26AWG.
 镀金厚度:3u"~50u", 皆可提供。

客户用产品图

EXW		卓新工业股份有限公司 EXCELLENCE WIRE IND.CO., LTD	
DIMENSION IN mm (Inch) TOLERANCE UNLESS OTHERWISE SPECIFIED	MATERIAL	图号 DWG NO.	名称 DESCRIPTION
.X±0.20	.XX±.2°	PC	PLUG-6P4C
.XX±0.10	.XX±.2°	PLUG-005-EXW	
审核 APPROVAL	核对 CHECKED	制图 DRAWN	张数 SHEET
		Lucia	2/1
			修改 REV
			A