

更改 REV	发行日期 DATE	设 变 内 容 MODIFICATION	修 改 DRAWN	核 对 APPROVED
	17/12/03	图号更新		

SPECIFICATIONS

1. ELECTRICAL.
- UL APPLICATIONS: 250 VOLTS AC MAX, AT 2 AMPS
DIELECTRIC WITHSTANDING VOLTAGE: 500 VOLTS AC.
INSULATION RESISTANCE: 500 MEGOHMS
TERMINATION: RESISTANCE 35 MILLIOHMS MAX AFTER ENVIRONMENTAL TESTING.
2. MECHANICAL.
- CABLE-TO-PLUG TENSILE STRENGTH: 20 lbs (89N) MIN.
DURABILITY: 2000 MATING CYCLES
3. MATERIAL & FINISH.
- HOUSING: POLYCARBONATE, UL94V-0
COLOR: TRANSPARENT OR OTHER COLOR ARE AVAILABLE
CONTACT BLADE: PHOSPHOR BRONZE
CONDUCTOR: STRANDED & SOLID WIRE, 24AWG, 26 AWG.
GOLD PLATING: 50u".

规范

1. 电器:

UL应用最大250VOLTS AC.
介质耐电压伏特数: 500VOLTS AC.
绝缘阻抗: 500 百万欧姆.
终端阻抗: 在环境测试后最大可承受35万欧姆终端阻抗

2. 机构

拉力测试 至少20lbs(89N).
耐久测试 至少2000次之插拔测试






3. 材质表面处理

塑胶壳: 聚碳酸酯, UL-94V-0.
颜色: 透明, 或者其他颜色亦可
金片: 磷铜片.
导体: 多股线 & 单股线, 24AWG, 26AWG.
镀金厚度: 50u".

客户用产品图

BLADE:

Type	Z-035	YL-035	YL-035
Drawing			

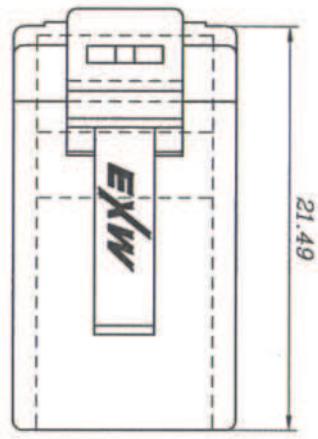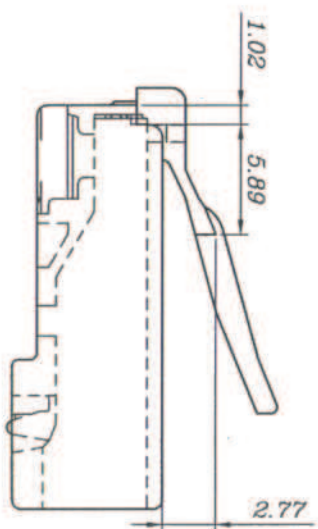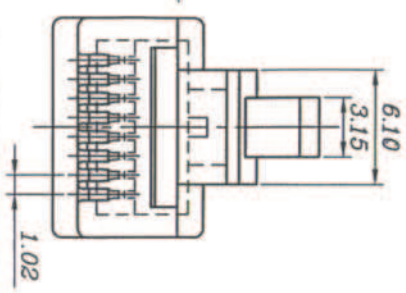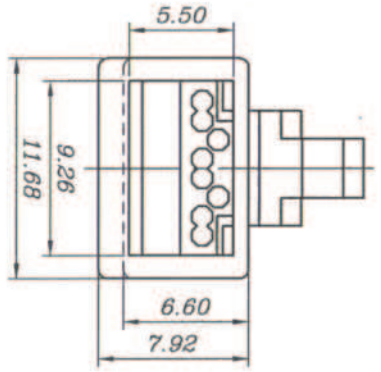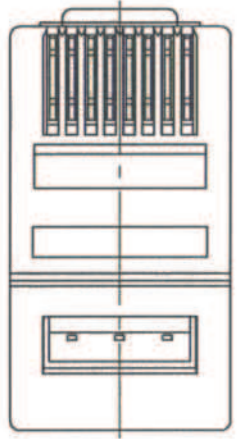

2003年 12月 24日


DIMENSION IN mm (inch)		材料 EXW		图号 PC		型号 PLUG-026-EXW	
TOLERANCE UNLESS OTHERWISE SPECIFIED		OTHERWISE SPECIFIED		名称 TITLE		比例 SCALE	
.X±0.20		.X±5°		CAT6(0.35)L UTP		5/2	
.XX±0.10		.XX±2°		Lucia		张数 1/1	
审核 APPROVAL		校对 CHECKED		制图 DRAWN		修改 REV	
				A			



1 2 3 4 5 6 7

A-B-C-D

REV	DATE	MODIFICATION	DRAWN	APPROVED
19/02/04				

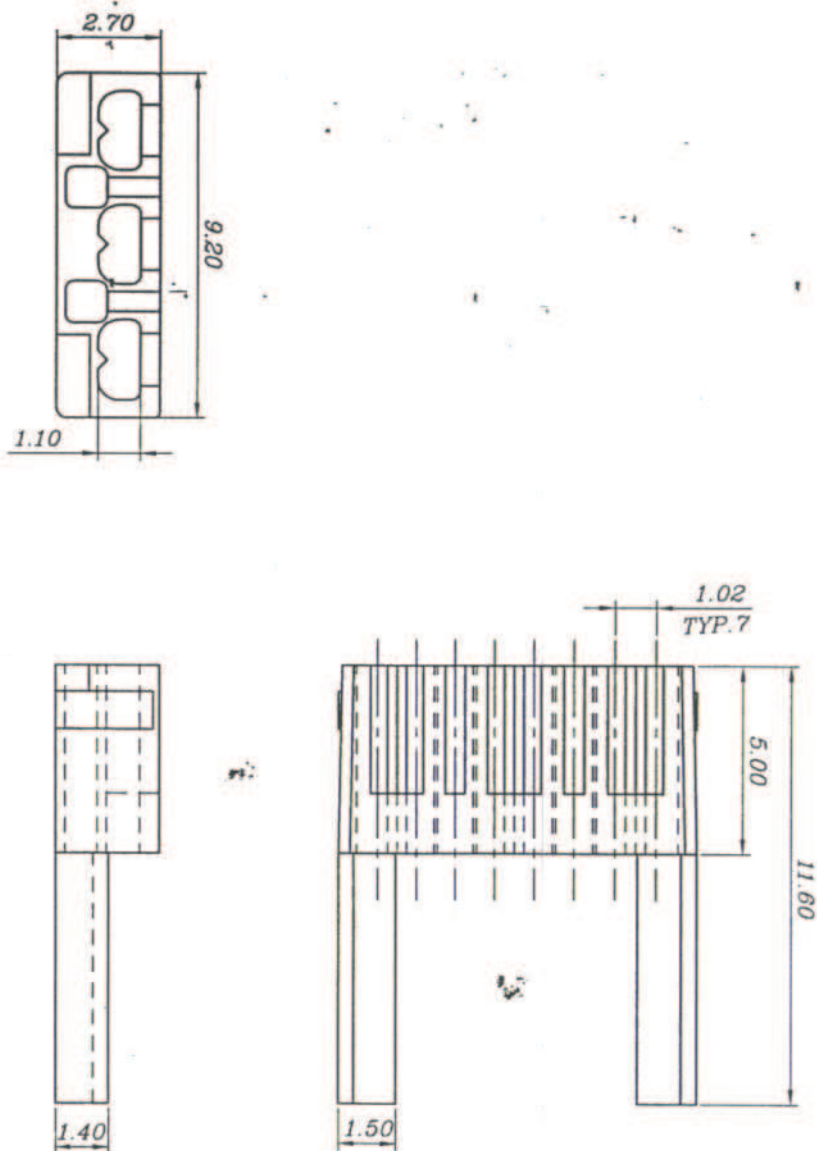

客户用产品图



DIMENSION IN mm (inch)		材料 MATERIAL		图号 DRAWING NO.	
TOLERANCE UNLESS OTHERWISE SPECIFIED		PC		PLUG INSERT-027	
.X±0.20	.X°±5°	名称 TITLE		CAT6PLUG支架(线孔1.10)	
.XX±0.10	.XX°±2°	制图 DRAWN		Lucia	
审核 APPROVAL	核对 CHECKED	比例 SCALE		5/1	
		制图人		1/1	
		审核人		B	

2004年 2月 19日

客户 2004年 2月 19日

1 2 3 4 5 6 7 ST-DR-009A