


# CAT.6 UTP Patch Cable

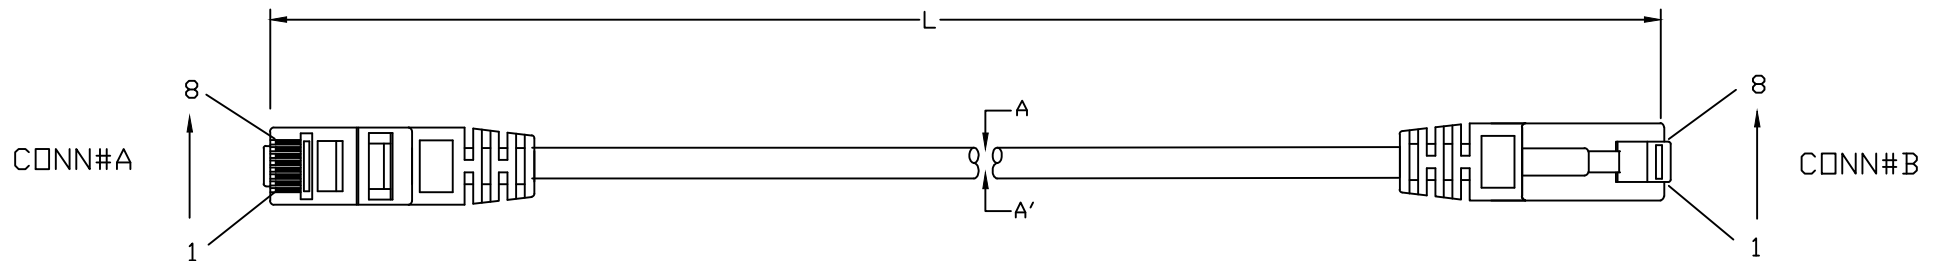

## CONN#A&CONN#B

1. U.S PLUG 8P8C, \*2PCS
2. Molding SR: PVC 45P

## PACKING

1. 1PC/PE Bag

## CABLE(TYPE CM)

1. Conductor: 24AWG 0.20±0.005mm/7 Stranded Bare Copper \*4Pairs
2. Insulation: ID: 0.93±0.05mm. Color: White-Green, Green; White-Orange, Orange; White-Blue, Blue; White-Brown, Brown
3. Jacket: (PVC), OD: 6.2±0.4mm Color: XX


## Electrical

1. According to UL 1863
2. Current Rating: 1.5 Amp Max.
3. Voltage Rating: 150 Volts
4. Contact Resistance: 20m-ohm
5. Insulation Resistance: 500M-ohm
6. Dielectric Withstand Voltage: 1000 VAC RMS, 60HZ 1MIN


## Mechanical:

1. Plug lifetime : 750 cycles.
2. Cable to Plug Tensile Force: 89N
3. Storage Temperature: -10°C to 60°C

SEC: A -- A'



WIRING: T568B

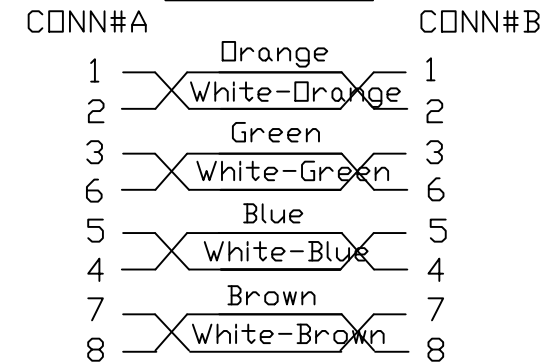

	DSGN		ITEM NO:
UNIT	CHK		GA-622017-XM-XX
m/m	APPR		
SCALE	<h1>Galaxy Technology Co., Ltd.</h1>		
1;1			
DRAW NO:			