

RCA



RCA >

Cabinet for consolidating office network infrastructure
under a desk. IP30, capacity 200 kg




■ RIGID CONSTRUCTION

High quality workmanship and up-to-date technology ensure a perfect look of the cabinet.



■ FLEXIBLE DOOR OPENING

The hinge system allows the door to open almost 180°. The door can be easily removed and re-mounted to change the direction of opening.

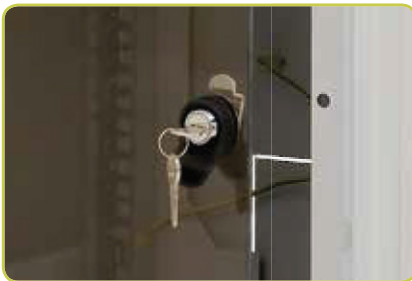

■ DOOR LOCK

It enables an easy and quick access into the cabinet.



■ ADJUSTABLE VERTICAL RAILS

Cabinet contains two pairs of freely adjustable 19" rails. Versions deeper than 800 mm are delivered with one additional pair of the middle vertical rails.



■ CASTORS

This type of cabinet is installed on castors (included in delivery). Two of them are with a brake.



■ BREAKOUT-TYPE BLANKING PANELS


Cable openings covered with breakout-type blanking panels are located in the bottom and rear part of the cabinet.

■ DOOR

The cabinet has fully glass door in standard. It can be steel or perforated if required.

RCA (DELTA C)

TYPE	A	B	C	D	E	Weight gross (kg)	Weight net (kg)	Maximum recommended load (kg)
	(mm)							
RCA-12-A68-CAX-A1	620	515	490	600	800	48,0	40,1	200
RCA-12-A69-CAX-A1	620	515	490	600	900	53,2	43,4	
RCA-12-A61-CAX-A1	620	515	490	600	1000	56,3	45,9	

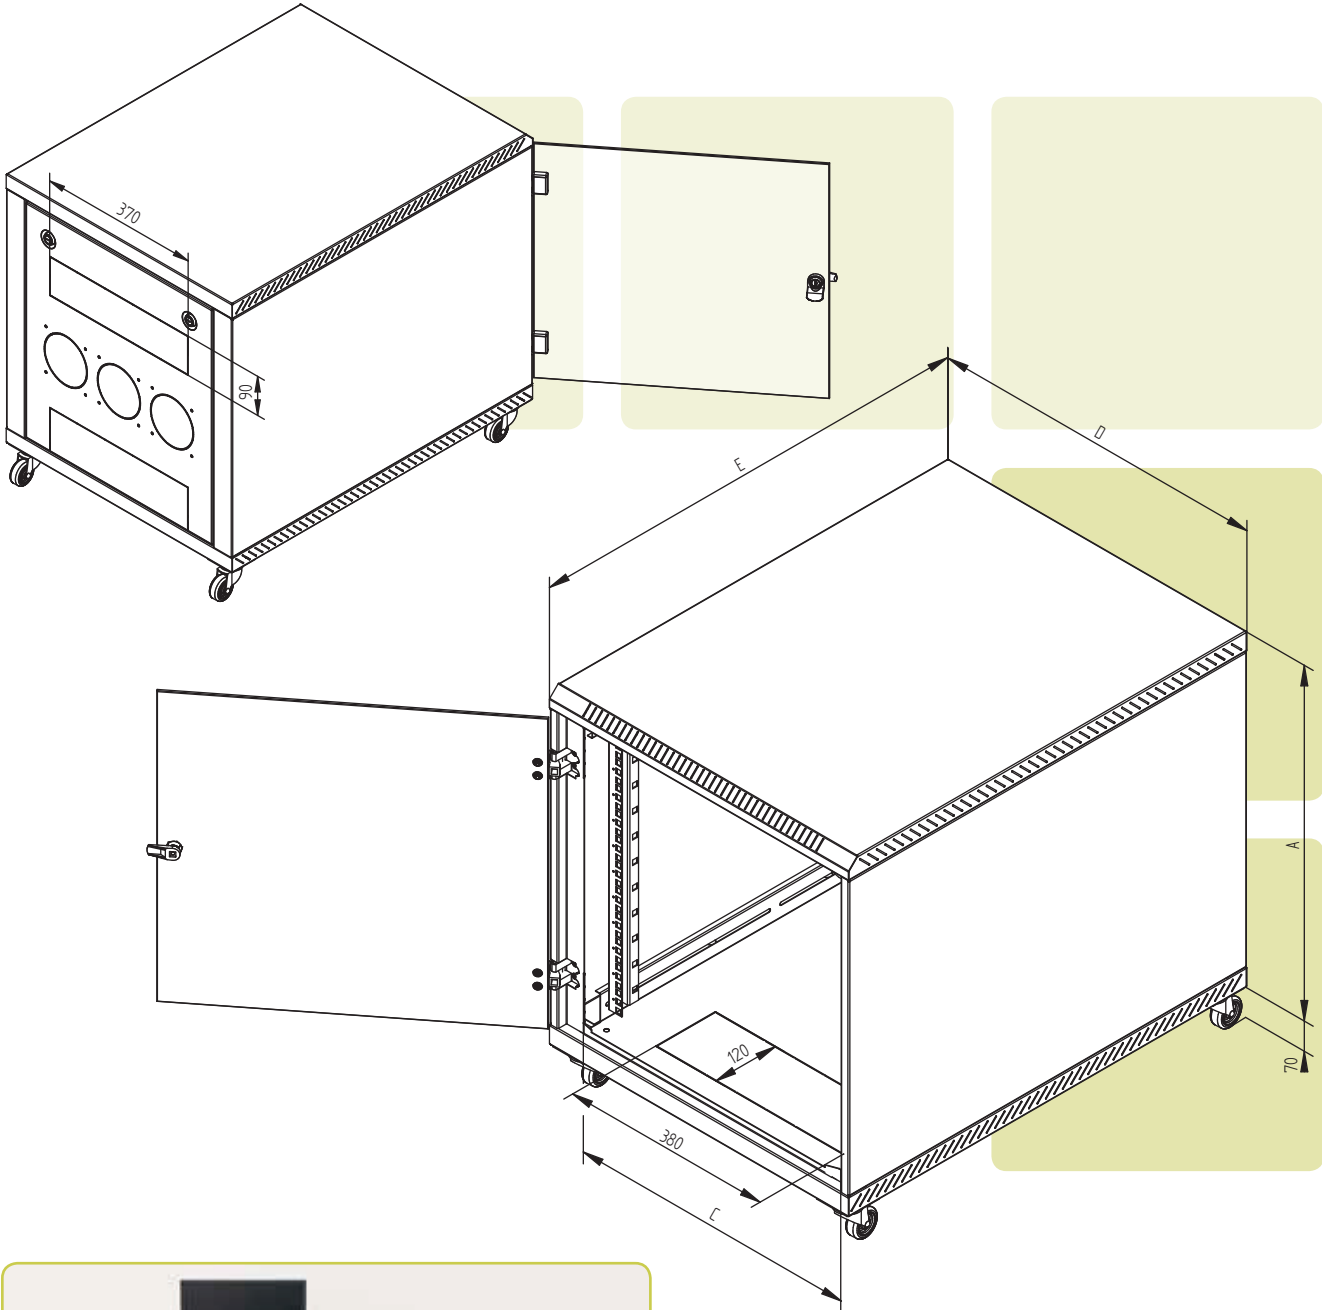

FAN UNIT INSTALLATION

On the back wall is the preparation in form of break-out openings for the installation of fan units RAX-CH-X2x-X1 or fans RAX-CH-X07-X9 for wall mounting cabinet to support cooling of installed equipment (see Active cooling).

SUPPLY

Key for the front door 2x
 Castors without a brake 2x
 Castors with a brake 2x



RCA CONTAINER CABINET

■ DESCRIPTION, PURPOSE OF USE

- 19" container cabinet with IP30 protection
- Cabinet is intended to be placed on castors under a work desk.
- The cabinet includes two pairs of vertical rails (three pairs at cabinets deeper than 800 mm).
- Cabinet construction:
 - Compact welded cabinet
 - Safety hardened glass door, thickness 4 mm. On demand may be metal or perforated.
- Max. permissible load of the door is 10 kg.
- Min. thickness of the surface finish is 65 µm.
- Cabinets are intended for installation of data and telecommunication devices and their distribution systems.
- The frame of the cabinet and all the removable parts are connected with earthing cables that have to be properly fixed and inserted into connectors during all the time when using the cabinet.
- There is one M8 screw placed on the bottom part of the cabinet as an earthing main point.
- Cable openings covered with breakout-type blanking panels are placed in the top and the bottom part of the cabinet rear side, others are in the bottom side of the cabinet.

■ OPERATING CONDITIONS

- Operating environment:
 - Office
 - The cabinet is not intended for outdoor installations and for installations in environment that can influence negatively the functionality of the cabinet and the mounted devices (e.g. environment with danger of explosion or humid and wet surroundings)
- Must be protected against:
 - Mechanical damage
 - Improper handling
 - A different usage than the cabinet is intended for
- Improper handling is especially:
 - Overloading (exceeding the maximum recommended load)
 - Device installation that can influence negatively operation and function of the cabinet or the installed equipment
 - Change of the construction or design of the cabinet

■ INSTALLATION OF THE CABINET

- This type of cabinet is installed on castors (included in supply). Two of them are with brake.

■ ENVIRONMENTAL PROTECTION

- All parts are made of recyclable materials and after decommissioning the cabinet, it must be disposed of according to relevant regulations.

■ CERTIFICATE AND CONFORMITY

- This product is certified with ITI TÜV, number of certificate 01.446.749/10/07/02/0, date 15. 4. 2010 and is fully in accordance with ČSN EN 62208, ČSN 731401+Z1 a Z2, ČSN 1991-1-1

