
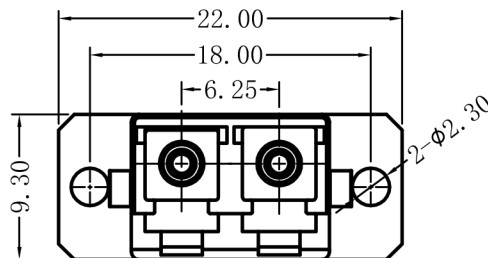
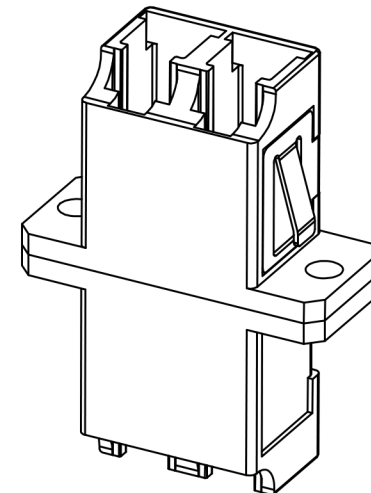
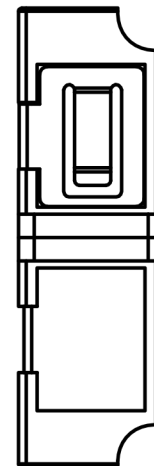


Specifications(规格要求)：

- 1.Please refer to tolerance table if no tolerance is specified (未注明公差请参照公差表)
- 2.Product surface must not have burr, be out of shape, dirty wait for undesirable phenomenon
(产品表面不可有毛边、变形、脏污等不良现象)
- 3.Raw materials need to meet Rohs standards (原材料需符合RoHS要求)
- 4.Insertion force and extraction force (插入力和拔出力)：≤19.6N
- 5.Insertion loss (插入损耗)：≤0.2dB
- 6.Durability test (耐久性测试)：500 cycles
- 7.High and low temperature testing (高低温测试)：-20℃ to 70℃

VERSION 版本	Engineering Change Description 变 更 描 述	DATE 日期
A0	新版发行	2019.4.11

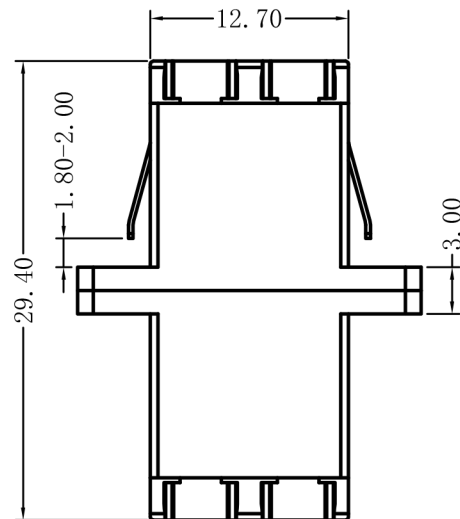

	COLOR	*
SM	Bule	S
APC	Green	A
MM	Gray	M
OM3	Aqua	W
OM4	Purple	P
OM5	Ningmeng Green	F
	Black	B
	Yellow	Y
	White	E
	Transparent	T

THIRD ANGLE PROJECTION
第三角投影:

DWG SIZE
大小:A4

DWG SCALE
比例: 1:1

GENERAL TOLERANCE TABLE 未注公差表	
>0mm~3mm	±0.05
>3mm~18mm	±0.10
>18mm~50mm	±0.15
>50mm	±0.20
ANGLES	ALL±0.5°

Raw Material 原 材 料:	
PC+10%GF	
DWG UNIT 单位:MM	DWG SHEET 页:1 OF 1

DRAWING 制 图:	Justin-z
CHECKED 核 对:	
APPROVED 批 准:	

Product Model 产 品 型 号:	LC型适配器/LC adapter
Specification 产 品 规 格:	LC双芯分体有耳适配器 (金属卡簧)
Product Number 产 品 编 号:	M1ALC-*02YT07F-1EEEE