


△	Rav	Detail	Rav	Date
△	A	NEW RELEASE	Kelvin	2013-09-24
△				

LC-LC Ø2.0mm LSZH Cable Duplex Patch cord

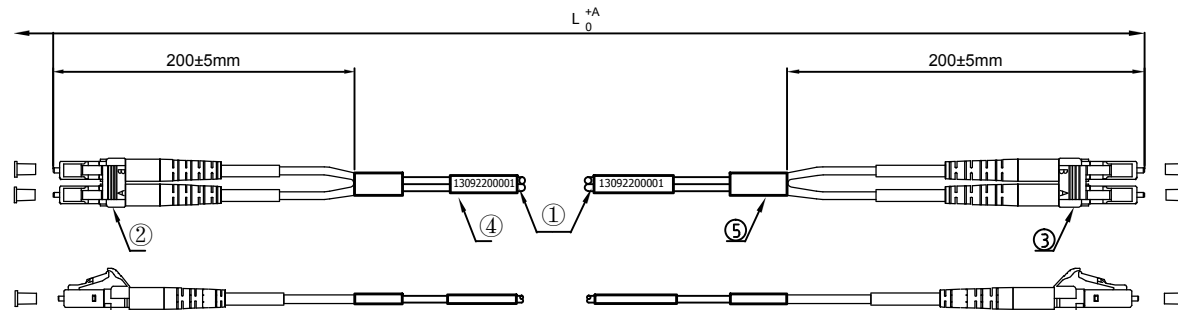


Length (M)	Min	Max	Unit
L<1.5	0	50	mm
L>=1.5	0	5	%
Maximum difference between connectors on a duplex patch cord		5	mm

Noto

1. All parts complaint with RoHS
2. Compliance with Telcordia GR326
3. Optical Performance

Item	SM				MM
	1310nm		1550nm		850nm
	UPC	APC	UPC	APC	UPC
Insertion Loss	<=0.3dB	<=0.3dB	<=0.3dB	<=0.3dB	<=0.2dB
Return loss	>=50dB	>=60dB	>=50dB	>=60dB	>=35dB



Note: 1. width:25mm,Length:30mm;
2. S/N:
year+month+day+sn, eg.:13092200001

Part No.	Fiber Type	Cable	LC Housing	LC Boot Simplex	LC Boot Duplex	
					Fiber 1	Fiber 2
444LXX	G.652D	Yellow (RAL5012)	Blue	White ⁽¹⁾	Black ⁽¹⁾⁽²⁾	Red ⁽¹⁾⁽³⁾
A44LXX	G.657A	Yellow (RAL5012)	Blue	White ⁽¹⁾	Black ⁽¹⁾⁽²⁾	Red ⁽¹⁾⁽³⁾
544LXX	62.5/125 OM1	Grey (RAL7004)	Beige	White ⁽¹⁾	Black ⁽¹⁾⁽²⁾	Red ⁽¹⁾⁽³⁾
644LXX	50/125 OM2	Orange (RAL2011)	Beige	White ⁽¹⁾	Black ⁽¹⁾⁽²⁾	Red ⁽¹⁾⁽³⁾
744LXX	50/125 OM3	Aqua (	Beige	White ⁽¹⁾	Black ⁽¹⁾⁽²⁾	Red ⁽¹⁾⁽³⁾
D44LXX	50/125 OM4	Violet	Beige	White	Black ⁽¹⁾⁽²⁾	Red ⁽¹⁾⁽³⁾

⁵⁾ The connector shall be marked so it is possible to identify the fibre.(e.g. A and B)
LC duplex shall have clip to make the separate connectors a duplex connector. The clip shall be easy removable with retained function.

5	TUBE,BLACK HEAT SHRINK.(LENGTH:15±3mm)	2
4	Lable	1
3	LC 2.0mm Connector	2
2	LC 2.0mm Connector	2
1	Φ 2.0mm LSZH Jacket Duplex Optical Cable	L
	DESCRIPTOPN	Qty

Title	LC-LC 02.0mm LSZH Cable Duplex Patch cord							
Ser.No:			Spec:					
Drawing	Kelvin	2013-09-24	Drawing No:					
Check	Bill	2013-09-24	Material:					
Approve	William	2013-09-24	Scale: N/A	Unit: mm		Ver: 1.00	Page: 1 of 1	